

# TRIM™ C270

## High-performance Synthetic

TRIM C270 is a state-of-the-art synthetic coolant. C270 provides excellent cooling and chip settling, good tramp oil rejection, and machine cleanliness, and meets the need of the modern job shop for a single premium synthetic coolant for virtually all machining operations.

### *Wilson Tool Finds the Formula for Worker Health & Safety with Master Fluid Solutions®*



*Global custom tooling company Wilson Tool International provides a complete line of tooling products for the additive, tableting, stamping, bending, and punching industries. From the louvers on the back of a microwave to the back panel of a computer server, if a company needs something to stamp out different forms, Wilson Tool likely makes it.*

## Aerospace Approvals

| Company   | Specification              |
|---|----------------------------|
| GE Aviation   | No specification available |
| Raytheon Technologies/Collins Aerospace/Pratt & Whitney | PMC 9392                   |
| Rolls-Royce   | CSS 130                    |
| Safran Group  | PR6300 Index A             |



### Choose C270:

- C270 is compatible with a very wide range of materials including: cast iron, steels, and copper alloys, as well as plastics and composites
- Provides excellent corrosion inhibition on all common ferrous alloys
- Does a great job in form grinding, drilling, tapping, and reaming operations without chlorine or sulfur-based EP additives
- Extremely low carryoff for very low total operation costs
- Very low foam and mist
- Keeps your machines clean while leaving a soft, fluid film that protects the bare metal parts. This residual film is easily resolvable in coolant working solution to facilitate easy machine cleaning and minimize the buildup of sticky residues that can hold machine-destroying chips
- Exceptional sump life and very good tramp oil rejection
- A very low initial odor level which usually disappears after one-to-two days

### C270 especially for:

**Applications** — band sawing, belt grinding, Blanchard grinding, cooling, corrosion inhibition, creep-feed grinding, cutting, cylindrical grinding, double disc grinding, drilling, form cylindrical grinding, form grinding, grinding, internal grinding, plain grinding, reaming, surface grinding, surface milling, tapping, and turning

**Metals** — cast iron, composites, exotic alloys, nickel alloys, plastics, stainless steels, steels, titanium, and tool steels

**Industries** — aerospace, automotive, compressor, energy, machine tool, and medical

**C270 is free of** — animal derived materials, chlorinated EP additives, DCHA, nitrites, NPEs, phosphorous, siloxane, and sulfurized EP additives

# TRIM™ C270

## High-performance Synthetic



### Application Guidelines

- The harder you work this product the better the results will be.
- C270 is not recommended in machine tools that rely on the splash of the coolant to lubricate the mechanical portions of the machine tool, e.g. older screw machines, etc.
- C270 is not recommended on materials like magnesium or zirconium without special precautions.
- This product is a superior cleaning agent so it may "wash out" dirt and residues when a machine is first charged; a thorough cleaning of older machines is required when installing this product the first time.
- The minimum recommended concentration is 5% on cast iron and 4% on steel.
- Concentrations above 7.5% provide excellent corrosion inhibition, tool life, and sump life; however, the best concentration for your operation should be determined by on-site experience.
- For additional product application information, including performance optimization, please contact your Master Fluid Solutions' Authorized Distributor at <https://www.masterfluids.com/in/en-in/distributors/index.php>, your District Sales Manager, or email us at [india-info@masterfluids.com](mailto:india-info@masterfluids.com).


### Physical Properties Typical Data

|   |                          |
|---|--------------------------|
| Color (Concentrate)                     | Colorless to pale yellow |
| Color (Working Solution)                | Colorless                |
| Odor (Concentrate)                      | Mild, sweet              |
| Form (Concentrate)                      | Liquid                   |
| Flash Point (Concentrate) (ASTM D92-90) | > 100°C                  |
| pH (Concentrate as Range)               | 9.0 - 9.3                |
| pH (Typical Operating as Range)         | 8.7 - 9.2                |
| Coolant Refractometer Factor            | 3.3                      |
| Titration Factor (CGF-1 Titration Kit)  | 0.56                     |
| Digital Titration Factor                | 0.0175                   |
| V.O.C. Content (ASTM E1868-10)          | 110 g/l                  |

### Recommended Metalworking Concentrations


|                            |              |
|----------------------------|--------------|
| Light Duty                 | 4.0% - 6.5%  |
| Moderate Duty              | 6.5% - 8.5%  |
| Heavy Duty                 | 8.5% - 10.0% |
| Design Concentration Range | 4.0% - 10.0% |

### Concentration by % Brix

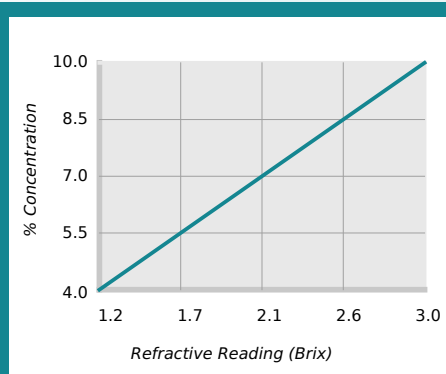

% Concentration = Refractive Reading x Refractive Factor  
Coolant Refractometer Factor % Brix = 3.3

### Concentration by Titration

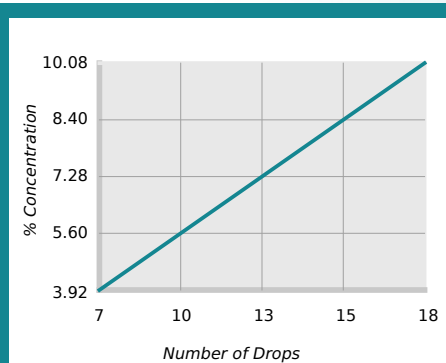

% Concentration = No. of Drops x Titration Factor  
Titration Factor = 0.56

### Health and Safety

Request SDS



# TRIM™ C270

## High-performance Synthetic



### Mixing Instructions

- Recommended usage concentration in water: 4.0% - 10.0%.
- To help ensure the best possible working solution, add the required amount of concentrate to the required amount of water (never the reverse) and stir until uniformly mixed.
- Use premixed coolant as makeup to improve coolant performance and reduce coolant purchases. The makeup you select should balance the water evaporation rate with the coolant carryout rate. Use our Coolant Makeup Calculator to find the best ratio for your machine: [apps.masterfluids.com/makeup/](https://apps.masterfluids.com/makeup/).
- Use mineral-free water to improve sump life and corrosion inhibition while reducing carryoff and concentrate usage.

### Ordering Information

20-litre pail

204-liter drum

1000-litre IBC

TRIM™ C270 | ©1998-2024 Master Fluid Solutions® | 2024-04-24

### Additional Information

- Use Master STAGES™ Whamex XT™ for a quick and thorough precleaning of your machine tool and coolant system.
- Consult Master Fluid Solutions before using on any metals or applications not specifically recommended.
- This product should not be mixed with other metalworking fluids or metalworking fluid additives, except as recommended by Master Fluid Solutions, as this may reduce overall performance, result in adverse health effects, or damage the machine tool and parts. If contamination occurs, please contact Master Fluid Solutions for recommended action.
- TRIM™ is a trademark of Master Chemical Corporation d/b/a Master Fluid Solutions.
- Master STAGES™ and Whamex XT™ are trademarks of Master Chemical Corporation d/b/a Master Fluid Solutions.
- The information herein is given in good faith and believed current as of the date of publication and should apply to the current formula version. Because conditions of use are beyond our control, no guarantee, representation, or warranty expressed or implied is made. Consult Master Fluid Solutions for further information. For the most recent version of this document, please go to this URL:

[https://2trim.us/di/?i=in\\_en-in\\_C270](https://2trim.us/di/?i=in_en-in_C270)



B-41, Chakan MIDC Phase - 2, Village  
Bhambuli,  
Post Vasuli, Tal. Khed, Pune -410 501.  
Maharashtra,  
India  
+91 2135 675961

[india-info@masterfluids.com](mailto:india-info@masterfluids.com)

[masterfluids.com/in/en-in/](https://masterfluids.com/in/en-in/)

