


Master STAGES™ CLEAN 2115AL

Low Foam Spray Washing Compound



Master STAGES™ CLEAN 2115AL is an aluminium compatible, high performance, low foam synthetic washing compound for use in very high-pressure spray washers, de-burring, and water jet cutting. Advanced surfactant technology provides excellent foam control and tramp oil rejection.

Master STAGES™ CLEAN 2115AL Reduces Cleaning Fluid Costs by 50% for Auto Manufacturer

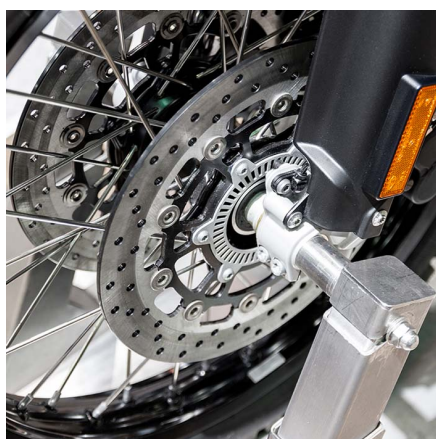

The customer is one of the largest auto brands and manufacturers in the world, with a diverse product line ranging from consumer cars and motorcycles to aircraft. Established in the 1960s, the customer has remained one of the most trusted manufacturers of motorcycles in Thailand, holding a top rank in sales volume for over 30 years.

In 2021, the company expanded further into the Asia-Pacific marketplace by adding distribution to its offerings.

Aerospace Approvals

Company	Specification
GE Aviation	for stainless steel
Raytheon Technologies/Collins Aerospace/Pratt & Whitney	PMC 1243

Choose CLEAN 2115AL:

- Compatible with a wide range of materials including aluminium, cast iron, steels, zinc, plastics, and composites
- Resists foaming even when contaminated with large quantities of soils or coolant. This makes CLEAN 2115AL an excellent choice where rapid buildup of coolant carryover creates a foam problem
- Many CLEAN 2115AL applications are in the range of 3,000 to 10,000 PSI (200-700 Bar)
- Provides short term corrosion inhibition on cast iron and ferrous alloys

CLEAN 2115AL especially for:

Applications — corrosion inhibition, de-burring, high-pressure spray washing, parts washing, VHP spray (very high pressure), vibratory, water-jet cutting

Soils — coolant residues

Metals — aluminium, aluminium alloys, brass, bronze, cast iron, composites, copper, copper alloys, ferrous metals, plastics, steel alloys, steels and zinc

Industries — automotive

CLEAN 2115AL is free of — nitrites and silicates

Master STAGES™ CLEAN 2115AL

Low Foam Spray Washing Compound



Application Guidelines

- In very high-pressure spray washers (over 1,000 PSI, 69 Bar), de-burrers or water jet cutters, typical concentrations are 3% to 5%, and operating temperatures are ambient up to 60°C.
- Foam may increase if the temperature is below 27°C at the point of agitation.
- For best corrosion resistance on ferrous parts, concentration should be kept between 5% and 10%.
- CLEAN 2115AL has excellent aluminum compatibility. However, it is wise to pre-check tolerance for high temperatures (over 50°C) or long exposure times (over 5 minutes) when washing 2000, 5000, or 7000 series wrought, or 300 series cast alloy.
- For additional product application information, including performance optimisation, please contact your Master Fluid Solutions' Authorised Distributor at <https://www.masterfluids.com/eu/en/distributors/index.php>, your District Sales Manager, or call our Tech Line at +49 211 77 92 85 - 13.


Physical Properties Typical Data

Colour (Concentrate)	Light yellow
Colour (Working Solution)	Colorless
Odour (Concentrate)	Mild Amine
Form (Concentrate)	Liquid
Flash Point (Concentrate) (ASTM D93-08)	> 100°C
pH (Concentrate as Range)	9.0 - 9.5
pH (Typical Operating as Range)	8.3 - 8.7
Coolant Refractometer Factor	2.6
Cleaner Conductivity Factor	0.00180
Titration Factor (CL-1 Titration Kit)	0.28
Number of Cleaner Vials (CL-1 Titration Kit)	2
Cleaner Indicator A or B (CL-1 Titration Kit)	B

Recommended Metalworking Concentrations


Design Concentration Range	3.0% - 10.0%
----------------------------	--------------

Concentration by % Brix

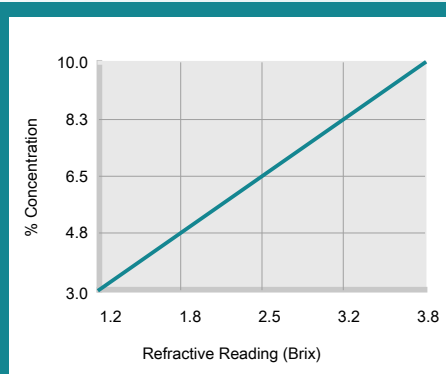

% Concentration = Refractive Reading x Refractive Factor
Coolant Refractometer Factor % Brix = 2.6

Concentration by Titration

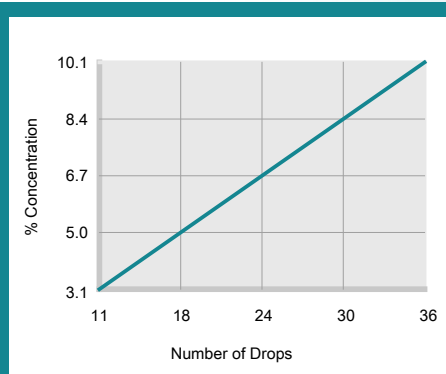

% Concentration = No. of Drops x Titration Factor
Titration Factor = 0.28

Health and Safety

Request SDS



Master STAGES™ CLEAN 2115AL

Low Foam Spray Washing Compound



Mixing Instructions

- Recommended usage concentration in water: 3.0% - 10.0%.
- To help ensure the best possible working solution, add the required amount of concentrate to the required amount of water (never the reverse) and stir until uniformly mixed.

Ordering Information

20-litre pail

204-litre drum

1000-litre IBC

Master STAGES™ CLEAN 2115AL | ©2005-2024 Master Fluid Solutions™ | 2024-04-19

Additional Information

- Industrial use only
- Consult Master Fluid Solutions before using on any metals or applications not specifically recommended.
- This product should not be mixed with other metalworking fluids or metalworking fluid additives, except as recommended by Master Fluid Solutions, as this may reduce overall performance, result in adverse health effects, or damage the machine tool and parts. If contamination occurs, please contact Master Fluid Solutions for recommended action.
- Master STAGES™ is a trademark of Master Chemical Corporation d/b/a Master Fluid Solutions.
- The information herein is given in good faith and believed current as of the date of publication and should apply to the current formula version. Because conditions of use are beyond our control, no guarantee, representation or warranty expressed or implied is made. Consult Master Fluid Solutions for further information. For the most recent version of this document, please go to this URL:

https://2trim.us/di/?i=eu_en_CLEAN2115AL



Hasselsstraße 6-14
Düsseldorf, 40597
Germany
+49 211 41 72 81 00

info-eu@masterfluids.com

masterfluids.com/eu/en/

